


Wall Control-2 Projector HDMI Instructions

Control Panel helpful information:

- Press and hold the power “ON” button until you hear a click sound. This indicates the command is completed.
- The projector picture on the control panel will flash during the warm up cycle for the projector.
- When turning “ON” and “OFF” the “Screen” will go Up and Down at the same time.
- You also have manual “Screen” control buttons below the “Audio” control buttons.
- Press and hold the power “OFF” button until you hear a click sound. This means the command is completed.
- The right side buttons of the control panel will act as a remote control for the DVD player when “DVD” is chosen on the control panel.
- The bottom row of buttons have “AUDIO” and “MUTE” buttons that will allow you to play audio without turning on the projector. (NICE!)
- Push the “AUDIO” button to have sound and volume control from the device you have chosen.
- Push the “MUTE” button and the sound will turn off.
- When connecting a “Laptop Computer” with VGA select the “Laptop” source button on the control panel.
- When connecting a “Laptop Computer” with HDMI select the “HDMI” source button on the control panel.

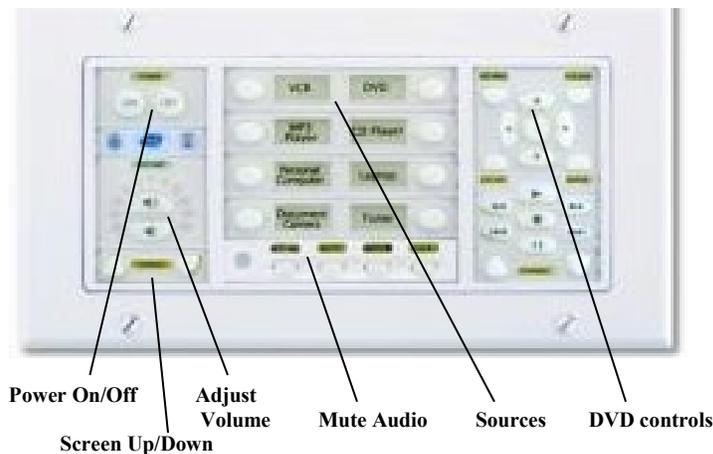

Qomo Document Camera:

- ▶ Select options on top/front of unit or remote
 - Please use remote or buttons on unit to operate the camera.
***Manual operation can damage the Camera Head**
 - Use **Scroll** to move image up/down
 - Use the **Lamp** button to toggle between the light settings
 - Adjust **Bright+/-** button to improve picture quality
 - Use **Auto Focus** button to focus the camera
 - Use **Zoom+/-** buttons to enlarge/shrink images
 - Turn the image by selecting **ROTATE** button

